




Window Films

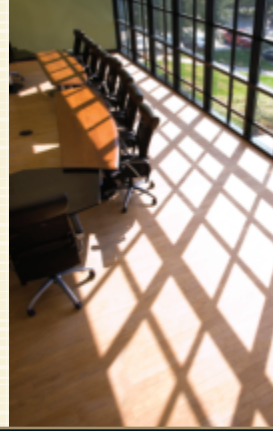


Ceramic Series CM 50

Available at:



Clear Energy Savings

www.sunrayfilms.com



Interior View

Ceramic Series benefits:

- Natural tone with amazing clarity
- High heat rejection provides energy savings and improves comfort
- Low reflectivity enhances views and overall beauty
- Significantly extends the life of furnishings by rejecting UV rays, the single largest cause of fading
- Non-metal technology eliminates corrosion
- Reduces glare and eye discomfort
- Increases personal safety by minimizing flying glass
- Comprehensive 3M manufacturers warranty

Performance results*:

Visible Light Transmitted	53%
Total Solar Energy Rejected	47%
Solar Heat Gain Coefficient	0.53
Infrared Rejected	68%
Solar Heat Reduction	35%
Visible Light Reflected Int.	10%
Visible Light Reflected Ext.	12%
UV Rejected	99%
Glare Reduction	40%

*Performance data generated for a typical film on 6mm glass using applicable industry test methods and standards. Infrared rejection measured from 900nm - 1000nm.

Ceramic Series CM 50

Clear Energy Savings



Glass Type (All 1/4")	Single Pane Clear	Single Pane Tinted	Double Pane Clear	Double Pane Tinted
Visible Light Transmitted	53%	32%	47%	28%
Total Solar Energy Rejection	47%	55%	43%	58%
Solar Heat Gain Coefficient	0.53	0.45	0.57	0.43
Solar Heat Reduction	35%	28%	18%	16%
Visible Light Reflected Int.	10%	9%	12%	11%
Visible Light Reflected Ext.	12%	7%	18%	9%
UV Light Rejected	99%	99%	99%	99%
Glare Reduction	40%	33%	40%	40%
Shading Coefficient	0.61	0.52	0.66	0.49
U Value	1.03	1.03	0.47	0.47


*Performance data generated for a typical film on 6mm glass using applicable industry test methods and standards. Infrared rejection measured from 900nm – 1000nm. This data represents center of glass values in accordance to NFRC 100/200, and is measured on NFRC required glass types, actual performance will vary with specific glass type.



Renewable Energy Division

3M Center, Building 235-2S-27
St. Paul, MN 55144-1000
www.3m.com/windowfilm

© 3M 2009. 3M is a registered trademark of 3M Company.
70-0709-0364-9 (892)ii



Exterior View